

CAT 5e U/UTP Patch Panel



P/N: DNET12345-24



UTP Cat.5e Patch Panel, 24 Port, 110 or Dual Use IDC




P/N: DNET12345-48

UTP Cat.5e Patch Panel, 48 Port, 110 or Dual Use IDC

Presentation:

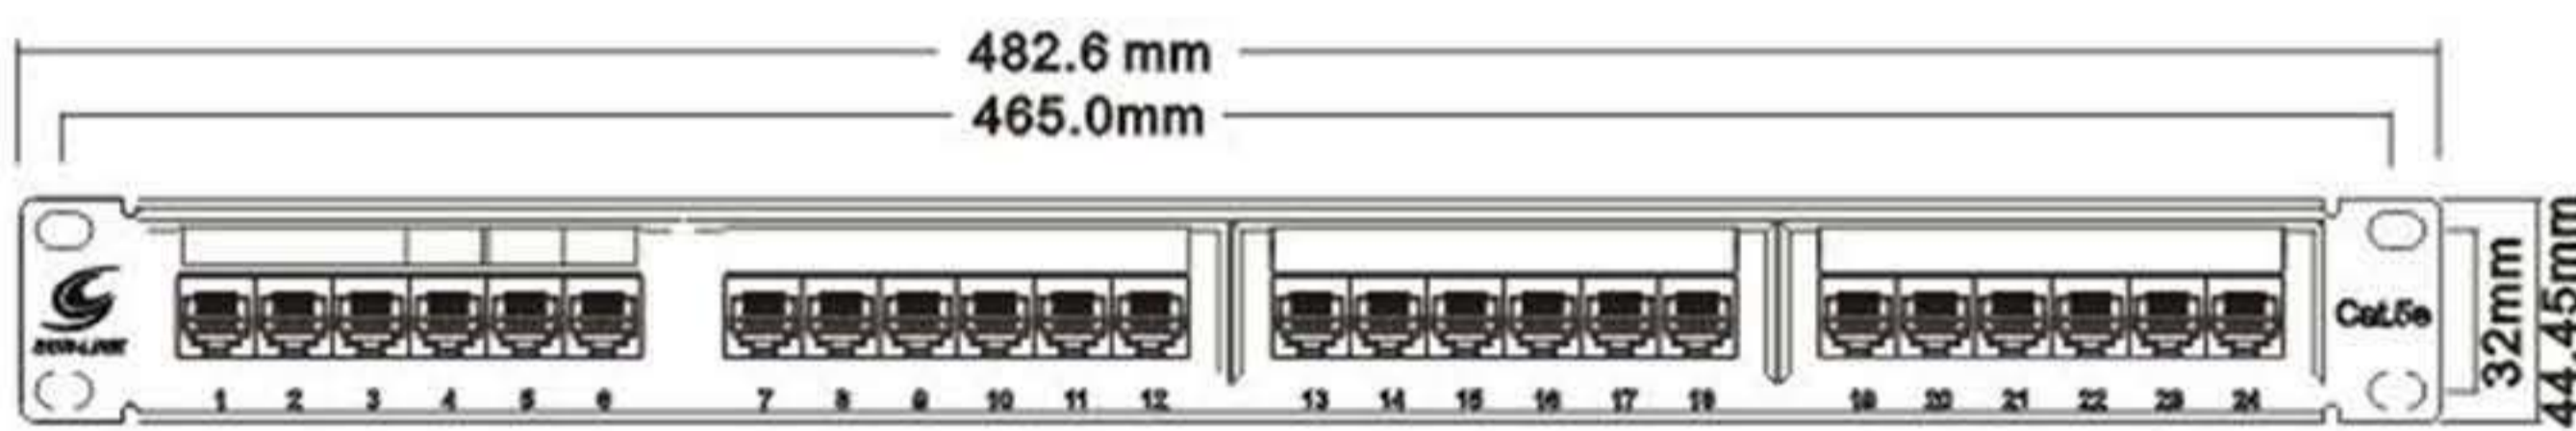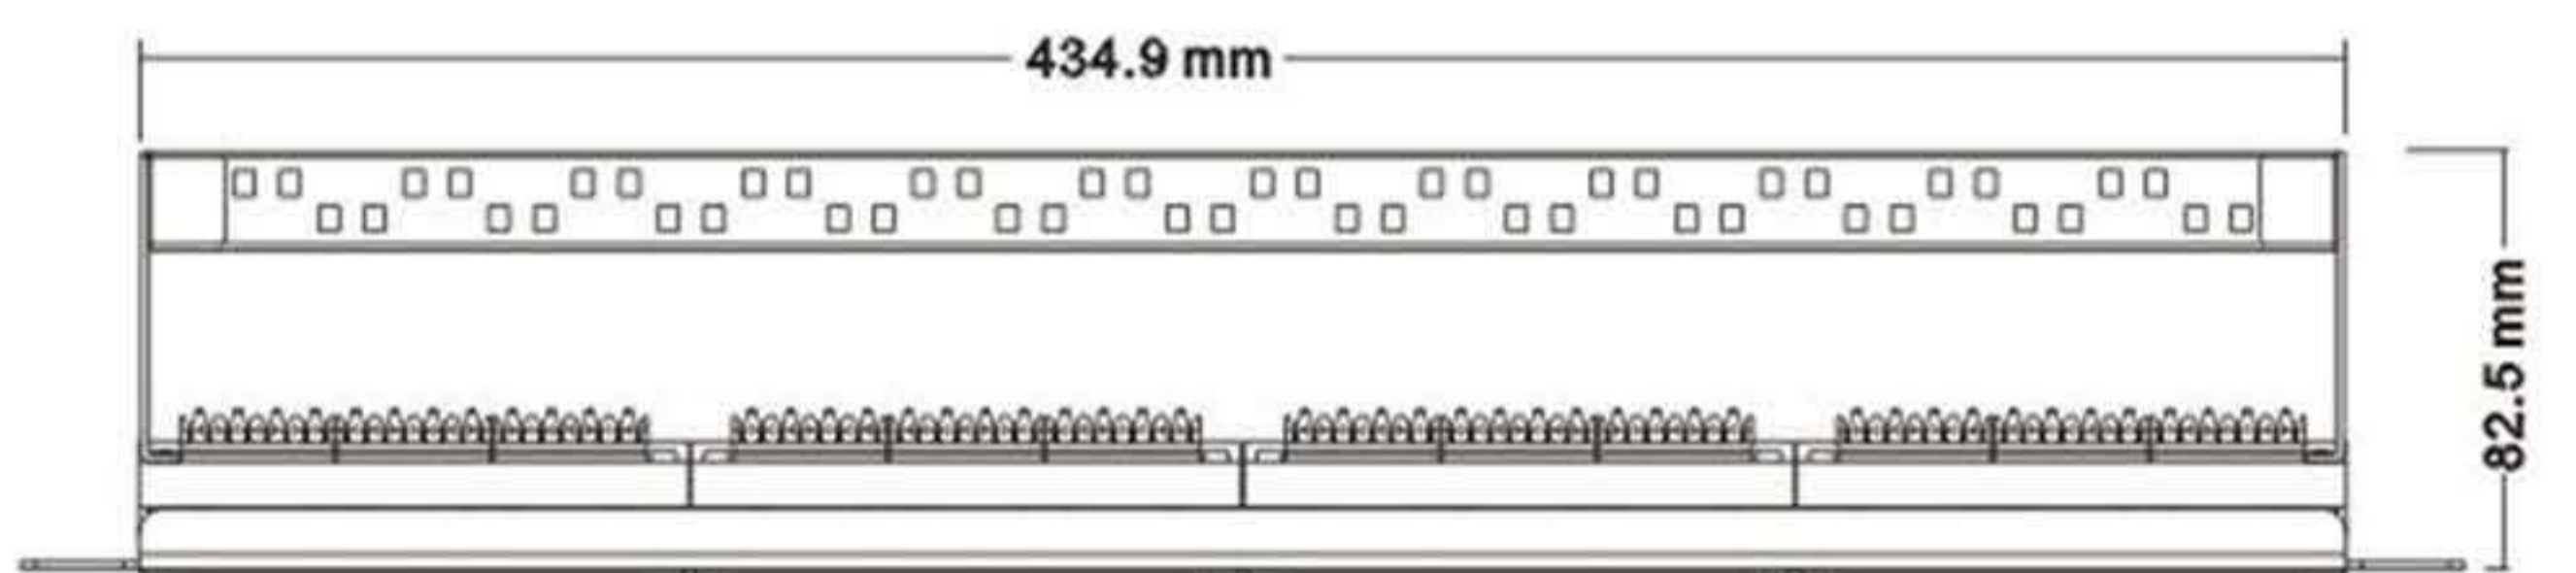

1U=44.45MM 2U=88.90MM

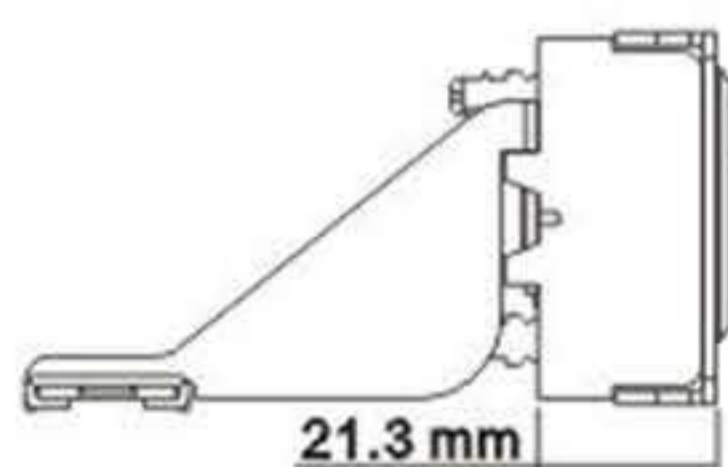

Main Description of The Product:

1. 24/48 ports patch panel, Cat.5e UTP type. The structure of each port of this patch panel is same which makes sure that the performance of each port is consistent.
2. All kinds of cables with different dimensions can be fixed on the patch panel.
3. According to the standard of ISO/IEC 11801:2002 CLASS D and ANSI/TIA/EIA/568B Cat.5e Standard. T568A punching sequence and T568B punching sequence are both compatible. Fitting for Horizontal Distribution in the Equipments Room and equipments connecting.
4. connecting: FCC port for Cat.5e UTP patch cord and IDC for horizontal distribution cables.
5. compatibility: Compatible for UTP Cat.5e general cable distribution systems.
6. IDC: 110 type or dual use type for your choice.

Technique Characteristics:

1. Entire high-carbon steel outer frame, with plastic powder cladding.
2. RJ45 jack Frame Material: PBT; golden plated phosphor bronze pins; Shielding shell of the Rj45 jack: Brass housing with nickel-plated; IDC clip: Tinned phosphor bronze pins.
3. Fitting for 22AWG, 23AWG and 24AWG cables, Punching Duration: 250 times. FCC ports inserting duration: 750 times.

